




CONCRETE

BODYBUILDING MADE EASIER!

Tailormade for your application with best preparations available.

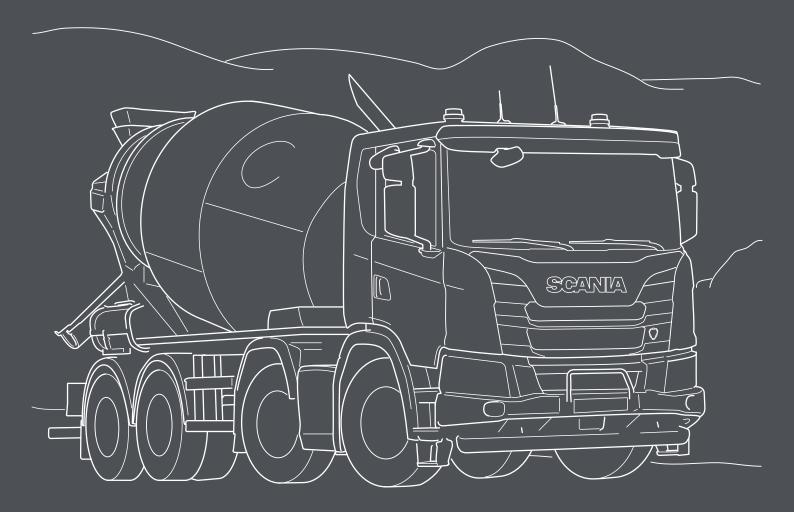

Truck specification Chassi: G 410 B8x4NZ Cab: CG171

BCI Bodywork communication interface FPC5837 BCI is a programmable interface between the truck and bodywork facilitating communications between truck and bodywork. The BCI can be programmed with advanced logics for safety and other operational funtionality in the bodywork.

Bodybuilder tube across IP C*

All trucks are supplied with an empty tube inside the instument panel, dedicated for the bodybuilder.

Instrument panel control lights BB FPC3888

There are many options for the bodywork to provide the driver with information, 8 lamps, sound and display messages in the instrument cluster. The lamps can indicate with different colours.

Bodywork programmable switches preparation FPC7682 Enables the BCI control unit to be programmed with the BICT tool for Pushbutton BCI reserved quantity (06793) switches.

CAN switches FPC6793

Spaces in the instrument panel are reserved for extra switches that are programmed in the BCI control unit.

Headlight protection FPC2021 The headlights are protected by a steel grille.

BB electrical supply 150A

All trucks are supplied with a

dedicated electrical output,

conviniently located behind the

mudguard of the 1st front axle.

continually, 250A max B*

3x7 pole electrical preparation from cab FPC2411

We can offer 3 different solutions of electrical preparations, 1, 2 or 3 pieces with 7 poles in each (containes different types of 1,5mm2, 2,5mm2 and CAN cables). Extension cable FPC 3023 Lenght: 2, 8 or 12 meter, delivered inside cab.

Mudguards 2nd front axle FPC4050

The mudguard on the second front axle is heightadjustable. It is supplied from the factory in the highest position, but can be easily adjusted to three different positions to fit with the bodywork and tvres.

Air supply inside frame A*

A dedicated outlet for BB needs of air is included on every chassis. This is the one and only place allowed to connect air supply to bodywork.

BB brackets (flexible/with holes)

FPC3303 Scania can offer many different body attachment brackets to suit a variety of applications. The bodywork is bolted into the upper row of holes on the bracket.

Lowered steering linkage 2nd front axle D*

With the new design, Bodybuilder have much more clearance in this area.

Body work holes in frame, Pre punched top row FPC 7432

Frame prepared with an upper row of holes. The holes are spaced at 50 millimetres and are used to attach the bodywork to the frame of the truck.

Side marker lights FPC313

Different numbers of lamps are supplied depending on the length of the vehicle. These are available temporarily or permanently mounted.

Rear overhang in 10mm steps FPC1537

Scania can deliver a perfect adapted overhang to every bodywork within 10 mm steps.

Beacon FPC1330

Mounted on a robust aluminium bar, the rotating beacon supplies efficient warning light.

Working lamps rear wall cab top FPC5900

The work light consists of two LED headlamps fitted on the left and right-hand sides of the rear cab wall.

EG PTO clutch dependant power take-off FPC6392 The power take-off can only be used when the clutch pedal is released.

EG PTO preparation FPC3502

The electric preparation includes routed wiring for activation of an EG power take-off.

BB brackets (flexible/with holes/for welding) FPC3302

Scania can offer many different body attachment brackets to suit a variety of applications. The bodywork is bolted into the upper row of holes on the bracket.

Air and electrical prep to trailer FPC1556 Trailer connections can be specified in Continental or Nordic versions

Trailer coupling FPC1540 A towing unit (coupling) is required in order to tow a trailer after the truck. The towing unit is fitted in the truck's drawbeam and both must withstand the forces that arise.


Roof rails FPC1401

The roof rails are in aluminium which simplifies the fitting of an air deflector, roof rack and other extra equipment.


EK PTO, clutch-independent power take-off FPC1298

The EK730 is mounted on the clutch housing at ""12 o'clock"". The power take-off rotates anticlockwise, seen from the rear, and is designed for direct-mounted equipment.

Hydraulic pump FPC4801 With hydraulic pump for bodywork. Pump type and pump volume can be selected fit different needs/applications.

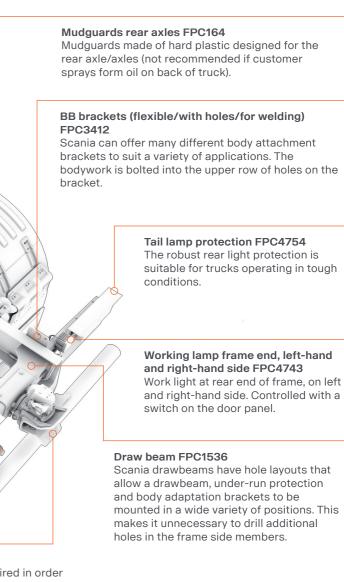

The bodybuilding process "Together we can make the best trucks in the world"

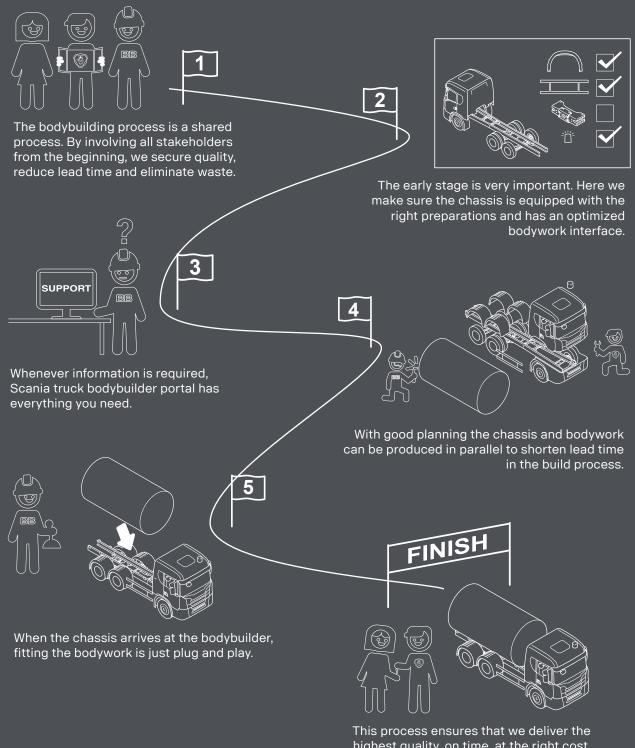

highest quality, on time, at the right cost. And the customer will take delivery of the best truck in the world.

Scania CV AB SE 151 87 Södertälje, Sweden Telephone +46 8 553 810 00 mail@scania.com www.scania.com