

RECOVERY

BODYBUILDING MADE EASIER!

Tailormade for your application with best preparations available.




BUILDING PROCESS

"Together we can make the best trucks in the world"




The bodybuilding process is a shared process. By involving all stakeholders from the beginning, we secure quality, reduce lead time and eliminate waste.

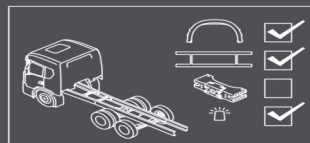


The early stage is very important. Here we make sure the chassis is equipped with the right preparations and has an optimized bodywork interface.




Whenever information is required, Scania truck bodybuilder portal has everything you need.

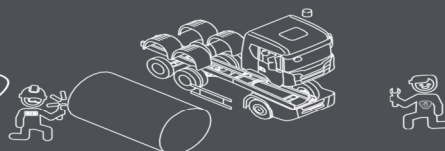

With good planning the chassis and bodywork can be produced in parallel to shorten lead time in the build process.

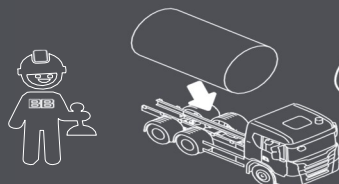

When the chassis arrives at the bodybuilder, fitting the bodywork is just plug and play.

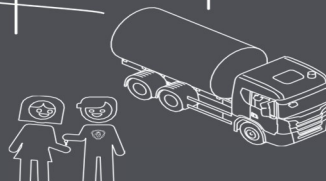

This process ensures that we deliver the highest quality, on time, at the right cost. And the customer will take delivery of the best truck in the world.

Scania CV AB

SE 151 87 Södertälje, Sweden

Telephone +46 8 553 810 00


mail@scania.com

www.scania.com

www.truckbodybuilder.scania.com

Truck specification

Chassis: S 560 B8x4NB
Cab: CS20N

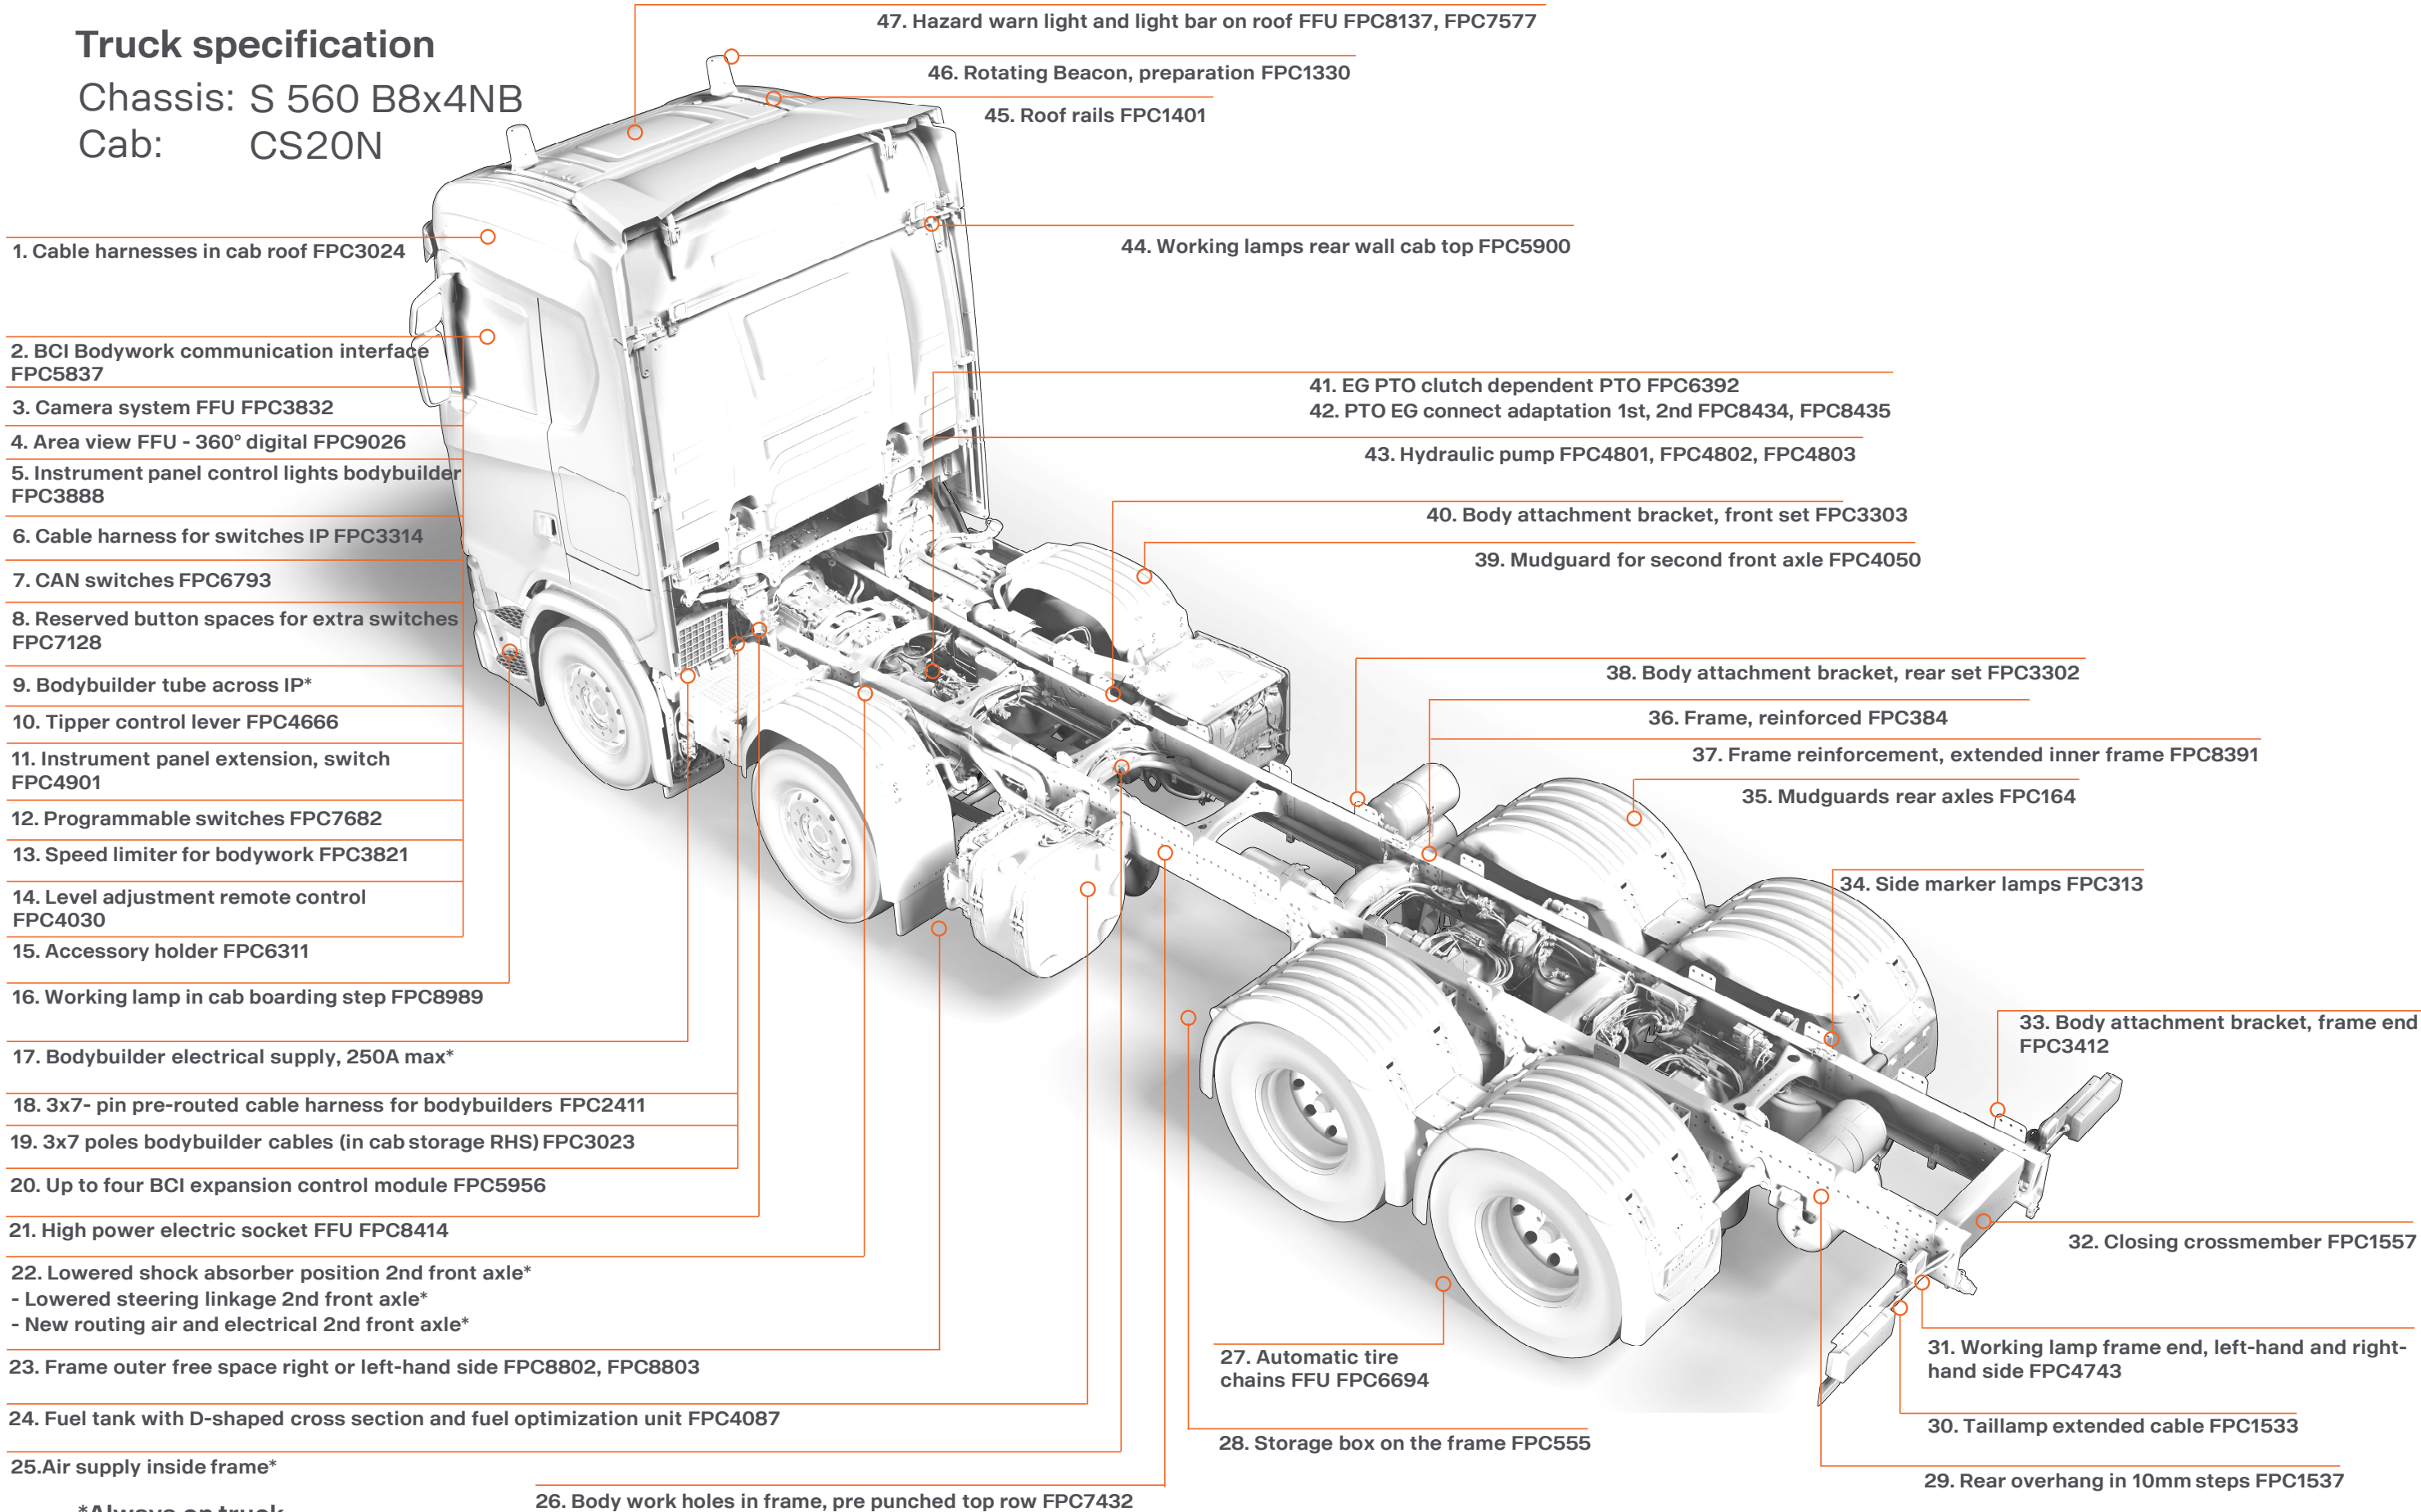

*Always on truck

Bodybuilding Made Easier – Additional Information

More options and detail information can be seen in TBB portal

1	Extra harnesses for bodybuilder installed in cab roof (FPC3024)	25	A dedicated outlet for bodybuilder who needs to have air for bodywork is included on every chassis. This is the one and only place allowed to connect air supply to bodywork
2	BCI is a programmable interface which is facilitating communications between truck and bodywork. The BCI can be programmed with advanced logics for safety and other operational functionality in the bodywork (FPC5837)	26	Frame prepared with an upper row of holes. The holes are spaced at 50 millimeters and are used to attach the bodywork to the frame of the truck (FPC7432)
3	Scania can offer many different options from factory for front and rear-view cameras to suit a variety of applications (FPC3832)	27	Automatic tire chains are used for increased traction in slippery conditions. The adaptation consists of a holder for pneumatic cylinders, routing of air and electricity, and a switch (FPC6694)
4	A system with area view, 360-degree system for visibility around the vehicle (FPC9026)	28	Available in three different length (FPC555)
5	There are many options for the bodywork to provide the driver with information, 8 lamps, sound and display messages in the instrument cluster (FPC3888)	29	Scania can deliver a perfect adapted overhang to every bodywork within 10 mm steps (FPC1537)
6	Extra harness for additional switches (FPC3314)	30	The cables to the rear lights can be specified in standard length or extended by 600 mm or 1200 mm (FPC1533)
7	Spaces in the instrument panel are reserved for extra switches that are programmed in the BCI control unit (FPC6793)	31	Work lights aimed backwards on the left and right-hand sides below the cab. Controlled with a switch on the door panel (FPC4743)
8	Space for extra switches can be reserved for custom adapted functions, the physical connection between switches and bodywork console must be performed separately (FPC7128)	32	Vehicles that do not have draw beam or any other types of crossmember at the rear of the frame must be fitted with a closing crossmember (FPC1557)
9	All trucks are supplied with an empty tube inside the instrument panel, dedicated for the bodybuilder	33	Scania can offer many different body attachment brackets to suit a variety of applications. The bodywork attachment is bolted into the upper row of holes on the chassis frame. The rear end of the chassis frame comprises the area from where the rear section ends to the rear edge of the chassis frame (FPC3412)
10	Selects how activation of the hydraulics should be performed with a switch or a lever (FPC4666)	34	Increase road safety by making it easier for other road users to notice the vehicle, available in fix or temporarily fitted (FPC313)
11	An extra panel with space for extra switch attached to the instrument panel (FPC4901)	35	Mudguards made of hard plastic designed for the rear axle/axes (FPC164)
12	Programmable switches makes it possible to program different switches via Scania bodywork interface configuration tool (BICT) (FPC7682)	36	The rear section of the frame is reinforced to enable it to carry a rear-mounted crane (FPC384)
13	The vehicle can have two additional speed limits that are programmed into the BCI control unit (FPC3821)	37	Extended inner frame reinforcement towards the rear end of the frame is to increase torsional rigidity and section modulus for the rear overhang (FPC8391)
14	Preparation for an extra remote for controlling suspension level that can be positioned as desired at the bodybuilder (FPC4030)	38	The rear section comprises the area from where the front section ends to 300-600 mm from the rear edge of the chassis frame (FPC3302)
15	Expansion module with accessory holder for tablet PCs and other hand-held devices (FPC6311)	39	The mudguard for the second front axle can be adjusted vertically. Possible to be adjusted in three positions in order to suit the bodywork and tires (FPC4050)
16	LED working lamps that are secured to the front right, left-hand or both side at the boarding step of the cab in order to illuminate the area adjacent to the truck (FPC8989)	40	The front section of the chassis frame comprises the area from the center of the foremost front axle to approx. 3,000 mm behind the front axle (FPC3303)
17	All trucks are supplied with a dedicated electrical output, located behind the mudguard of the 1st front axle	41	Gearbox mounted PTO are clutch dependent. These PTO can only be used when the clutch pedal is released (FPC6392)
18	Pre-routed cable harness from the bodywork's central electric unit in the cab to the chassis frame which makes it easier for the bodybuilders to have external access to the bodywork's central electric unit (FPC2411)	42	Selection of output flanges for PTO. If a double output PTO is specified, different flange types can be chosen for lower and upper connection (FPC8434, 8435)
19	Three 7-pin extension cable for connecting equipment on the frame in three different lengths; 2m, 8m or 12m (FPC3023)	43	Hydraulic pump type and volume can be selected to fit different needs/applications (FPC4801, 4802, 4803)
20	The expansion units/modules add additional in & outputs for programming more functionality (FPC5956)	44	The work light consists of two LED headlamps fitted on the left and right-hand sides of the rear cab wall (FPC5900)
21	The electrical socket allows a semi-trailer to be connected for battery charging or use of tail lift (FPC8414)	45	The roof rails are in aluminum which simplifies the fitting of an air deflector, roof rack and other extra equipment (FPC1401)
22	With the new design, Bodybuilder have much more clearance in this area	46	Preparation for rotating beacon. The preparation includes pre-routed cable harness to plugged holes in the cab roof and a switch installed in the cab. Order suitable warning lamp via accessories (FPC1330)
23	Possibility to specify different types of free space on the chassis frame (right- or left-hand side). This will facilitate the bodybuilding and enable the possibility to manage the weight distribution (FPC8802, FPC8803)	47	Installation of two LED-lamps, rotating beacon or hazard warning light bar mounted on cab roof providing additional safety for the vehicle (FPC8137 & FPC7577)
24	New D-shaped fuel tank range provides increased fuel capacity, reduced weight, improved robustness and easier serviceability. A Fuel optimization unit (FOU) is attached to the new D-shaped fuel tank to ensure that as much fuel as possible can be utilized from the tank (FPC4087)		

Scania CV AB

SE 151 87 Södertälje, Sweden

Telephone +46 8 553 81000

mail@scania.com

www.scania.com

www.truckbodybuilder.scania.com