




SWAP BODY TRANSPORT


BODYBUILDING MADE EASIER!

Tailormade for your application with best preparations available.

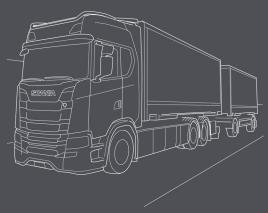

BUILDING PROCESS


"Together we can make the best trucks in the world"

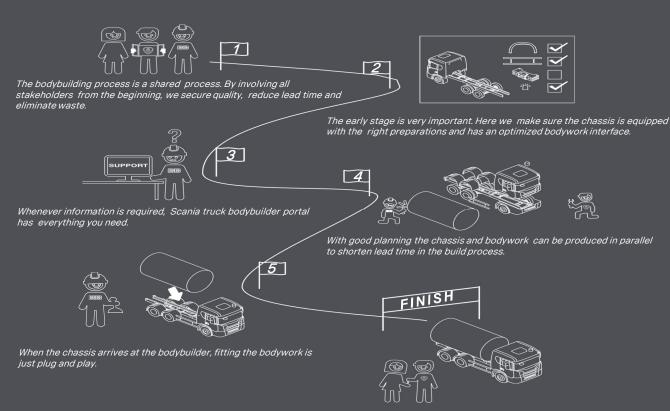

This process ensures that we deliver the highest quality, on time, at the right cost. And the customer will take delivery of the best truck in the world.

Scania CV AB
SE 151 87 Södertälje, Sweden
Telephone +46 8 553 810 00
mail@scania.com
www.scania.com

Swap body Transport

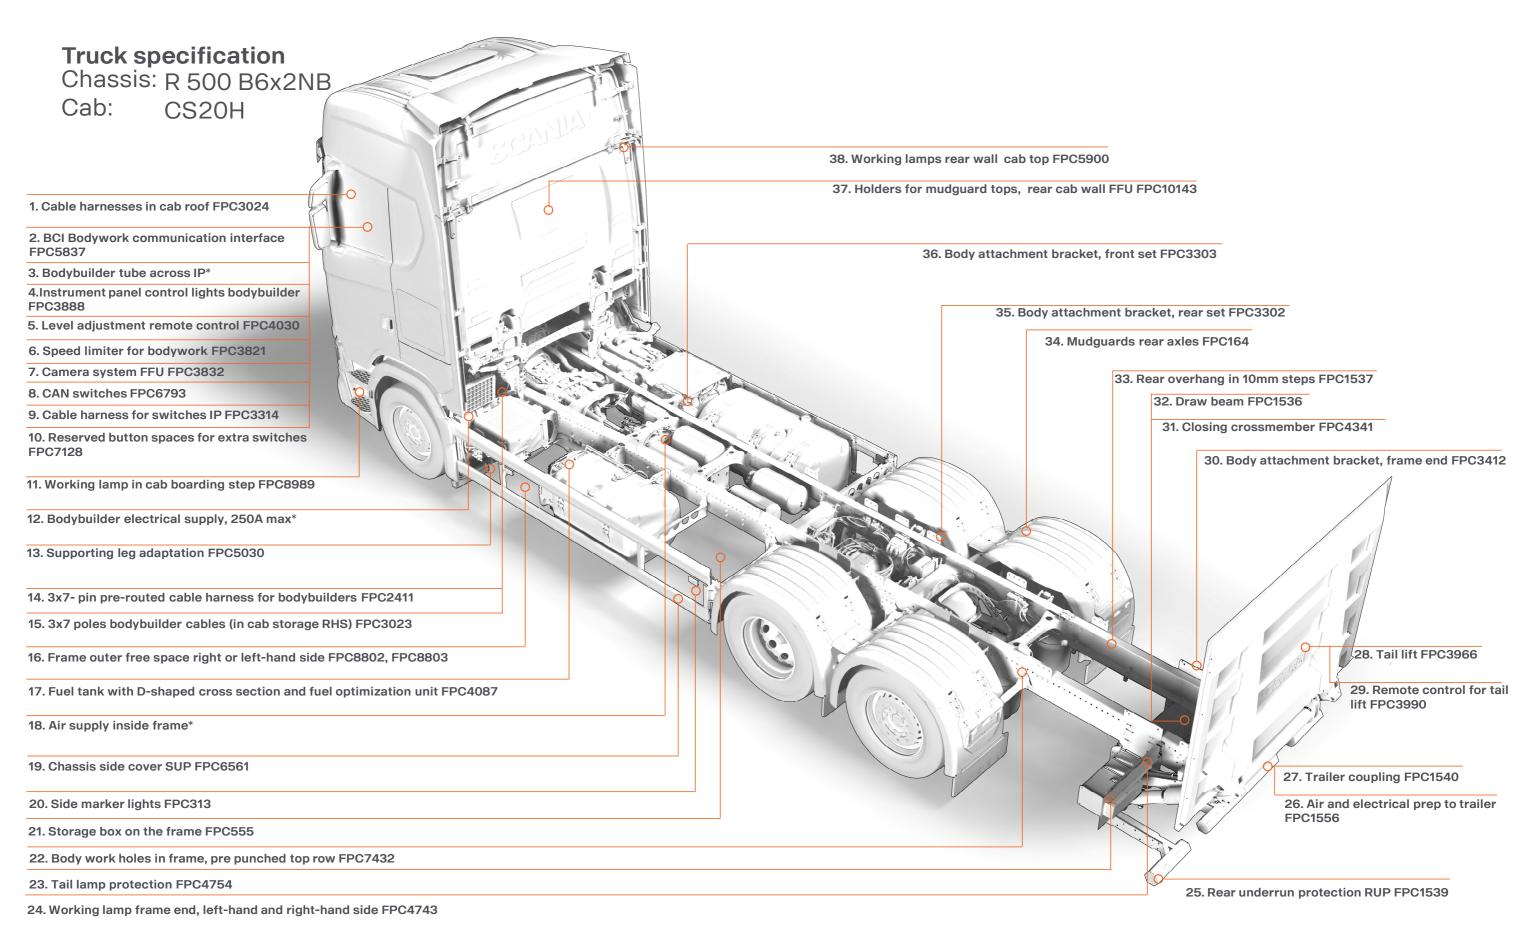

*Always on truck

Bodybuilders – Swap Body Transport 3

Bodybuilding Made Easier – Additional Information More options and detail information can be seen in TBB portal

1	Extra harnesses for bodybuilder installed in cab roof (FPC3024)	21	Available in three different length (FPC555)
2	BCI is a programmable interface which is facilitating communications between truck and bodywork. The BCI can be programmed with advanced logics for safety and other	22	Frame prepared with an upper row of holes. The holes are spaced at 50 millimeters and are used to attach the bodywork to the frame of the truck (FPC7432)
3	operational functionality in the bodywork (FPC5837) All trucks are supplied with an empty tube inside the	23	The robust rear light protection is suitable for trucks operating in tough conditions (FPC4754)
	instrument panel, dedicated for the bodybuilder	24	Work lights aimed backwards on the left and right-hand sides below the cab. Controlled with a switch on the door panel (FPC4743)
4	There are many options for the bodywork to provide the driver with information, 8 lamps, sound and display messages in the instrument cluster (FPC3888)		
5	Preparation for an extra remote for controlling suspension level that can be positioned as desired at the bodybuilder (FPC4030)	25	Rear underrun protection available in 3 different styles/executions, that meets UN ECE R58 with the supplement 03 (FPC1539)
6	The vehicle can have two additional speed limits that are programmed into the BCI control unit (FPC3821)	26	Trailer connections can be specified in Continental or Nordic versions (FPC1556)
7	Scania can offer many different options from factory for front and rear-view cameras to suit a variety of applications (FPC3832)	27	A towing unit (coupling) is required in order to tow a trailer after the truck. it is fitted in the truck's draw beam (FPC1540)
8	Spaces in the instrument panel are reserved for extra switches that are programmed in the BCl control unit (FPC6793)	28	Tail lift mounted at factory. If it's needed to be done locally, an electrical preparation can be chosen (FPC3966)
9	Extra harness for additional switches (FPC3314)	29	Wireless remote control for controlling the tail lift (FPC3990)
10	Space for extra switches can be reserved for custom adapted functions, the physical connection between switches and bodywork console must be performed separately (FPC7128)	30	Scania can offer many different body attachment brackets to suit a variety of applications. The bodywork attachment is bolted into the upper row of holes on the
11	LED working lamps that are secured to the front right, left- hand or both side at the boarding step of the cab in order to illuminate the area adjacent to the truck (FPC8989)		chassis frame. The rear end of the chassis frame comprises the area from where the rear section ends to the rear edge of the chassis frame (FPC3412)
12	All trucks are supplied with a dedicated electrical output, located behind the mudguard of the 1st front axle	31	Vehicles that do not have draw beam or any other types of crossmember at the rear of the frame must be fitted
13	The vehicle can be ordered from the factory with space for supporting legs behind the cab (FPC5030)	32	with a closing crossmember (FPC4341) Scania draw beams have hole layouts that allow a draw
14	Pre-routed cable harness from the bodywork's central electric unit in the cab to the chassis frame which makes it easier for the bodybuilders to have external access to the bodywork's central electric unit (FPC2411)	32	beam, under-run protection and body adaptation brackets to be mounted in a wide variety of positions (FPC1536)
15	Three 7-pin extension cable for connecting equipment on the frame in three different lengths; 2m, 8m or 12m (FPC3023)	33	Scania can deliver a perfect adapted overhang to every bodywork within 10 mm steps (FPC1537)
16	Possibility to specify different types of free space on the chassis frame (right- or left-hand side). This will facilitate the bodybuilding and enable the possibility to manage the weight distribution (FPC8802, FPC8803)	34	Mudguards made of hard plastic designed for the rear axle/axles (FPC164)
		35	The rear section comprises the area from where the front section ends to 300-600 mm from the rear edge of the chassis frame (FPC3302)
17	New D-shaped fuel tank range provides increased fuel capacity, reduced weight, improved robustness and easier serviceability. A Fuel optimization unit (FOU) is attached to the new D-shaped fuel tank to ensure that as much fuel as possible can be utilized from the tank (FPC4087)	36	The front section of the chassis frame comprises the area from the center of the foremost front axle to approx. 3,000 mm behind the front axle (FPC3303)
18	A dedicated outlet for bodybuilder who needs to have air for bodywork is included on every chassis. This is the one and only place allowed to connect air supply to bodywork	37	Holders for storing mudguard tops when not in use mounted on the rear mudguards. The holder is fitted in the middle of the rear wall of the cab and the holder has space for two mudguard tops (FPC10143)
19	Two different execution available, beam or skirts (FPC6561)		
20	Increase road safety by making it easier for other road users to notice the vehicle, available in fix or temporarily fitted (FPC313)	38	The work light consists of two LED headlamps fitted on the left and right-hand sides of the rear cab wall (FPC5900)

Scania CV AB

SE 151 87 Södertälje, Sweden Telephone +46 8 553 810 00 mail@scania.com www.scania.com